

SUPERLOCK DIGITAL RAPIDRESET SINGLE SIDED



SPECIFICATION
SHEET
BDGSRR

- 10 second code change** - Update the code fast with the code change button without taking the lock off the gate.
- Easy to fit** - Slim 70mm (2 ¾") wide lock case along with adjustable and removable latchbolt ensure easy fitting to gates.
- Easy to operate handle** - Designed particularly for those with mobility issues who find gripping and turning difficult.
- Highly Secure** - The latchbolt moves 15mm (5/8") ensuring the bolt enters deep into the gatepost.
- Hold-back function** - When the button on the back is activated to hold the lock in the open position.
- Anti-climb handle** - This lock is also fitted with an anti-climb handle to prevent intruders using the handle as a foot hold to climb the gate.

PRODUCT DETAILS


Product code:	Description:
BDGSRR1030L	To fit 10-30mm (½" - 1 ¼") gate frames, left hand
BDGSRR1030R	To fit 10-30mm (½" - 1 ¼") gate frames, right hand
BDGSRR4060L	To fit 40-60mm (1 ½" - 2 ¼") gate frames, left hand
BDGSRR4060R	To fit 40-60mm (1 ½" - 2 ¼") gate frames, right hand



BDGSRR right hand version shown

INSTALLATION

- Drill 2 x 9mm (3/8") holes at 140mm (5 ½") centres for fixing bolts provided.
- Drill a 18mm (¾") clearance hole for the latchbolt at 60mm (2 3/8") centres up from the bottom fixing hole.
- Fix the handles to the square spindles so that the handles are facing away from the latchbolt and secure using the hex key supplied.
- Hold the lock against the back of the box section and screw on the latchbolt through the larger hole.
- Lock the latchbolt with the hex key supplied by inserting the hex key into the end of the latchbolt.
- Fix lock in place using the stainless steel bolt support plate and the countersunk screws provided. Ensure the latchbolt moves freely.
- Fix strike plate by either welding or screw fixing onto the gate post
- MAINTENANCE** Every 6 months, lubricate the latchbolt with light oil. Annually, dismantle the lock and spray mechanism with light oil.
- If you have any problems with the latch bolt sticking, drill out the latch bolt hole as this should alleviate the issue.

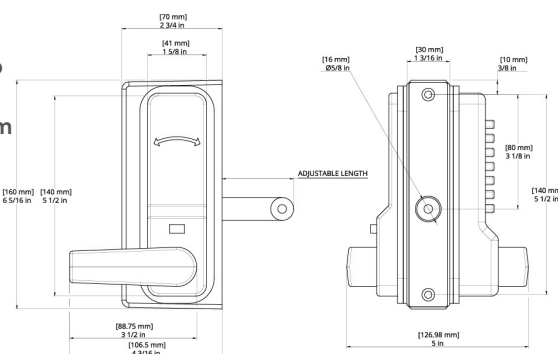

VISIT GATEMASTERLOCKS.COM FOR MORE
INFORMATION